

230_{VAC}

DU.IT14N

DU.IT24NVE

24_{VDC}

UNDERGROUND INSTALLATION

resin coated encoder



up to 3.5 m

DUIT.BR ACCESSORY AVAILABLE

(FOR THE ADJUSTMENT OF MOST OF FOUNDATION BOXES IN THE MARKET)



CONTROL UNITS:

DU.IT14N	BRAINY HEADY	140
		141
DU.IT14N-10	BRAINY HEADY	140
		141
DU.IT14NE	BRAINY	140
DU.IT14NV	BRAINY HEADY	140
		141
DU.IT14NVE	BRAINY	140
DU.IT14NVE-10	BRAINY	140
DU.IT24NVE	BRAINY24 ^{PLUS} BRAINY24	148
		149

Irreversible electromechanical geared motor available in 230 Vac and 24 Vdc version, with the option of opening to 180°. Full metal mechanics and built-in mechanical stop. It's available a model equipped with 10 m cable to facilitate wiring and prevent problems linked to the oxidation of electrical contacts (DU.IT14N-10/DU.IT14NVE-10).

230 Vac




- Irreversible 230 Vac electromechanical geared motor
- Also available in the fast version (DU.IT14NV), with IP68 encoder (DU.IT14NE) and fast version with IP68 encoder (DU.IT14NVE)
- The encoder guarantees maximum safety and precision while the gate is moving

Cams' disk not included



24 Vdc | intensive use

- Irreversible 24 Vdc electromechanical gear motor for intensive use equipped with IP68 encoder
- The encoder device ensures maximum safety and precision in the gate moving phases
- Amperometric sensor obstacle detection system to prevent crushing
- Optional battery powered operation

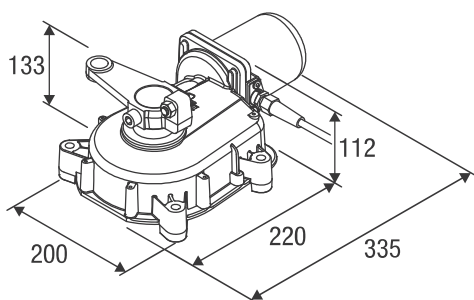



DU.ITIX
Self-supporting stainless steel foundation box max. opening 110°. Supplied with cover and cap, requires release accessory SB.DUxx.



DU.ITCF
Self-supporting foundation box with cataphoretic painted finish, max. opening 110°. Supplied with grey painted cataphoresis cover (RAL9006) cap, requires release accessory SB.DUxx.



DU.ITCF-BL
Self-supporting foundation box with cataphoretic painted finish, max. opening 110°. Supplied with black painted cataphoresis cover (RAL9005) and cap, requires release accessory SB.DUxx.



SB.DUIT.K
Kit comprising personalised release key and components to connect the motor to the gate. Mechanical stop incorporated.



SB.DUIT.L
Kit comprising release hex key and components to connect the motor to the gate. Mechanical stop incorporated.



SB.DUIT.L-UK
Kit comprising release hex key and elements to connect the motor to the gate. Equipped with adjustable mechanical stop.



SB.DU180.K
Kit comprising personalised release key and components to connect the motor to the gate, for openings up to 180°.



SB.DU180.L
Kit comprising release hex key and components to connect the motor to the gate, for openings up to 180°.



DU.ITST
Adjustable mechanical open stop 75°/80°/85°/90°/95°/100°.



DU.V96
12 Vac/dc vertical electric lock, supplied with counterplate. Permits internal/external release.



DU.V90
12 Vac/dc horizontal electric lock, supplied with counterplate. Permits internal/external release.



DU.9990
Covering plate for DU.V90.



E.LOCK
230 Vac vertical electric lock, supplied with counterplate.



E.LOCKSE
Extended cylinder for E.LOCK electric lock. It allows unlocking gates up to 55mm-thick from the outside.



DUIT.BR-L
Adaptors for the installation of a left-hand motor to the most common foundation boxes on the market.
DUIT.BR-R
Version for right motor with connecting rod.



DU.FCN
Watertight limit switches unit with cam holder disk included.



CABLE.24E
Cable reel with 5 conductors (2 for motor, 3 for encoder) for connecting the encoder device in the 24 Vdc versions. L= 100 m.



XLB.CB
Battery box fitted with universal bracket and cables. IP54.

TECHNICAL DATA	DU.IT14N*	DU.IT14NE	DU.IT14NV	DU.IT14NVE	DU.IT24NVE*
Motor supply	230 Vac (50-60Hz)	230 Vac (50-60Hz)	230 Vac (50-60Hz)	230 Vac (50-60Hz)	24 Vdc
Max absorbed current	1.6 A	1.6 A	1.6 A	1.6 A	11 A
Torque	370 Nm	370 Nm	220 Nm	220 Nm	280 Nm
Opening time	22"	22"	11"	11"	15"
Duty cycle	30%	30%	40%	40%	intensive use
Protection level	IP67	IP67	IP67	IP67	IP67
Encoder	NO	YES	NO	YES	YES
Operating temperature	-20°C /+50°C	-20°C /+50°C	-20°C /+50°C	-20°C /+50°C	-20°C /+50°C
Leaf max dimension	3.5 m	3.5 m	2.1 m	2.1 m	3.5 m
Weight	11.3 kg	11.2 kg	11 kg	11.2 kg	10 kg
Items no. per pallet	44	44	44	44	44
DU.ITIX weight	8.1 kg	8.1 kg	8.1 kg	8.1 kg	8.1 kg
DU.ITCF weight	9.6 kg	9.6 kg	9.6 kg	9.6 kg	9.6 kg
No. of foundation boxes per pallet	32	32	32	32	32

* Available in 115 VAC version